




# Spiral Hose – Non-Braided

- **Light and flexible**
- **Excellent resistance to oils, solvents, and both aqueous and non-aqueous solutions**
- **Long service life with outstanding aging qualities**

CEJN spiral hose is an excellent choice for applications that call for hose to have excellent recoil ability and crimp resistance. It offers high tensile and tear strength and resistance to impacts. The hose is abrasion resistant and is suitable for applications in a wide temperature range.

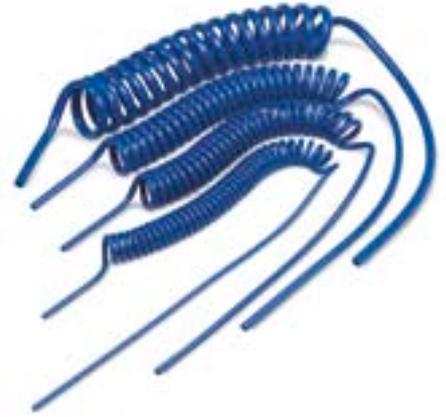

**Max. working pressure**..... 10 bar (145 PSI) (20°C, 68°F)  
**Min. burst pressure**..... 25 bar (362 PSI) (20°C, 68°F)  
**Hose material** ..... FDA approved, Ester-based polyurethane

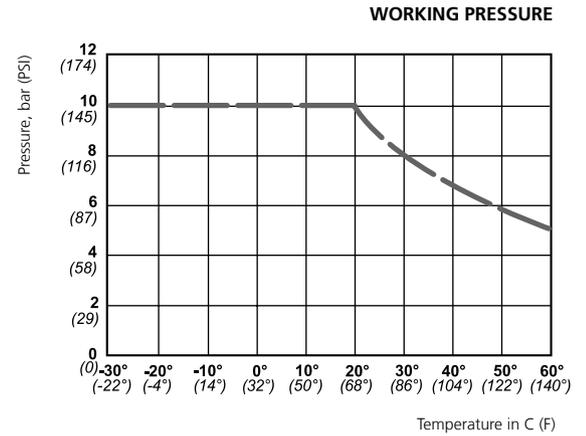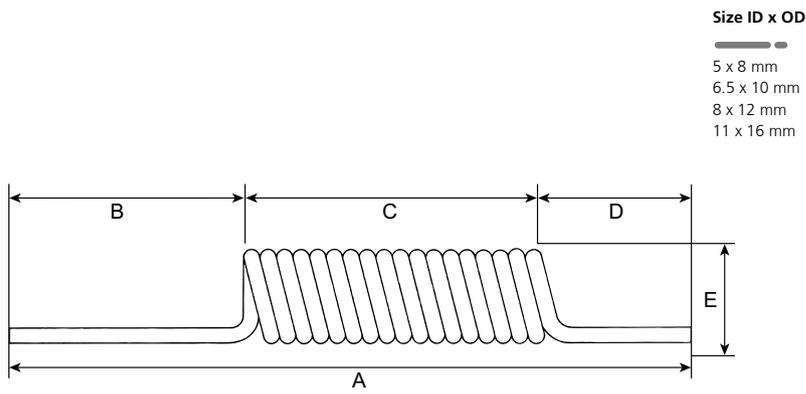

| SERVICE LENGTH  | ID x OD     | Total length | Part No.    | A    | B   | C   | D   | E  |
|-----------------|-------------|--------------|-------------|------|-----|-----|-----|----|
| <b>2 METERS</b> | 5 x 8 mm    | 2.5 m        | 19 958 5820 | 740  | 500 | 140 | 100 | 42 |
|                 | 6.5 x 10 mm | 2.5 m        | 19 958 6020 | 740  | 500 | 140 | 100 | 52 |
|                 | 8 x 12 mm   | 2.5 m        | 19 958 6220 | 740  | 500 | 140 | 100 | 65 |
|                 | 11 x 16 mm  | 2.5 m        | 19 958 6620 | 720  | 500 | 120 | 100 | 95 |
| <b>4 METERS</b> | 5 x 8 mm    | 5.0 m        | 19 958 5840 | 930  | 500 | 330 | 100 | 42 |
|                 | 6.5 x 10 mm | 5.0 m        | 19 958 6040 | 930  | 500 | 330 | 100 | 52 |
|                 | 8 x 12 mm   | 5.0 m        | 19 958 6240 | 920  | 500 | 320 | 100 | 65 |
|                 | 11 x 16 mm  | 5.0 m        | 19 958 6640 | 880  | 500 | 280 | 100 | 95 |
| <b>6 METERS</b> | 5 x 8 mm    | 7.5 m        | 19 958 5860 | 1120 | 500 | 520 | 100 | 42 |
|                 | 6.5 x 10 mm | 7.5 m        | 19 958 6060 | 1120 | 500 | 520 | 100 | 52 |
|                 | 8 x 12 mm   | 7.5 m        | 19 958 6260 | 1100 | 500 | 500 | 100 | 65 |
|                 | 11 x 16 mm  | 7.5 m        | 19 958 6660 | 1040 | 500 | 440 | 100 | 95 |
| <b>8 METERS</b> | 5 x 8 mm    | 10.0 m       | 19 958 5880 | 1300 | 500 | 700 | 100 | 42 |
|                 | 6.5 x 10 mm | 10.0 m       | 19 958 6080 | 1310 | 500 | 710 | 100 | 52 |
|                 | 8 x 12 mm   | 10.0 m       | 19 958 6280 | 1280 | 500 | 680 | 100 | 65 |
|                 | 11 x 16 mm  | 10.0 m       | 19 958 6680 | 1210 | 500 | 610 | 100 | 95 |

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, [www.cejn.com](http://www.cejn.com), for general maintenance tips.

# Spiral Anti-Spark Hose – Non-Braided

- **Spark and scorch resistant**
- **Excellent resistance to oils, solvents, and other non-aqueous solutions**
- **Long service life with outstanding aging qualities**



CEJN spiral anti-spark hose is resistant to scorching and damage due to exposure to sparks that are present in welding environments or where cutting equipment is in use. Its excellent recoil ability and outstanding aging qualities make it ideal for assembly lines and fixed workplaces. The hose can also be used for breathing air applications.

See the *CEJN Breathing Air Product Range* for more information.

**Max. working pressure**..... 10 bar (145 PSI) (20°C, 68°F)

**Min. burst pressure**..... 25 bar (362 PSI) (20°C, 68°F)

**Hose material**..... Ester-based polyurethane

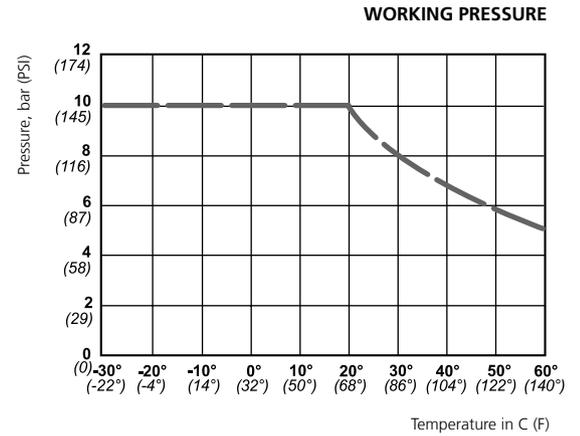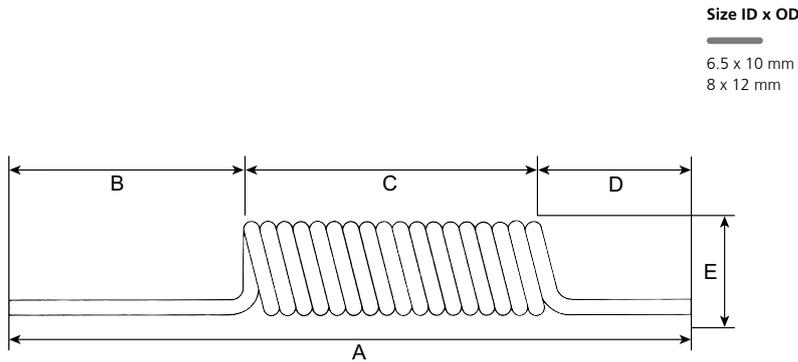

| SERVICE LENGTH | ID x OD     | Total length | Part No.    | A    | B   | C   | D   | E  |
|----------------|-------------|--------------|-------------|------|-----|-----|-----|----|
| <b>2 M</b>     | 6.5 x 10 mm | 2.5 m        | 19 958 4020 | 740  | 500 | 140 | 100 | 52 |
|                | 8 x 12 mm   | 2.5 m        | 19 958 4220 | 740  | 500 | 140 | 100 | 65 |
| <b>4 M</b>     | 6.5 x 10 mm | 5.0 m        | 19 958 4040 | 930  | 500 | 330 | 100 | 52 |
|                | 8 x 12 mm   | 5.0 m        | 19 958 4240 | 920  | 500 | 320 | 100 | 65 |
| <b>6 M</b>     | 6.5 x 10 mm | 7.5 m        | 19 958 4060 | 1120 | 500 | 520 | 100 | 52 |
|                | 8 x 12 mm   | 7.5 m        | 19 958 4260 | 1100 | 500 | 500 | 100 | 65 |
| <b>8 M</b>     | 6.5 x 10 mm | 8.0 m        | 19 958 4080 | 1310 | 500 | 710 | 100 | 52 |
|                | 8 x 12 mm   | 8.0 m        | 19 958 4280 | 1280 | 500 | 680 | 100 | 65 |

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, [www.cejn.com](http://www.cejn.com), for general maintenance tips.